

Turnstile

ID GATE 6200




PRODUCT DESCRIPTION

The ID GATE 6200 is a flexible and versatile turnstile for access control in various application areas such as offic buildings, airports, public transportation, museums, stadiums, retail, and universities. It ensures reliable and effective access control for authorized individuals, thereby enhancing security.

The turnstile regulates access to sensitive areas and increases security in the mentioned application areas. If you're looking for a reliable solution for access control, then the ID GATE 6200 is a perfect choice.

DIMENSIONS

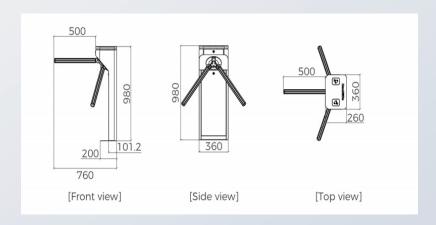

HIGHLIGHTS

- Durability, high operational reliability and fast response
- Transponder or ticket-based input and output possible alternatively free-turning output
- Automatic anti-panic folding arms that guarantee free passage in emergency situations (e.g. power failure or fire alarm)
- Integrated LED indicators show the throughput direction
- · Indoor & Outdoor variant available
- · 3 year warranty

Accessories (Optional)

- · iDTRONIC R840 Ethernet
- QR Code Reader ID Ident 1500/2000
- · Remote Control (Wired /Wireless)
- 3rd party reader installation (z.B. MIFARE, LEGIC, EM, HID etc.)





TECHNICAL DATA

SPECIFICATION	
Dimensions	360 x 260 x 980mm
Passage width	550mm, (Arm length: 500mm)
Material	Stainless steel 304 (IP44) Indoor Stainless steel 312 (IP65) Outdoor
Power supply	AC230V/110V, 50/60Hz
Power consumption	20W
Operating voltage	24V DC
Throughput frequency	35 people per minute
Emergency Mechanimus	Automatic anti-panic folding arms
Communication interface	relay signal
Operating temperature	-20 °C up to 75°C
Scope of Delivery	 Stainless steel Turnstile Stainless steel barrier arms Anchor Bolts (M12) + nuts Wired remote control (for testing only) Cleaning kit

DIMENSIONS INCLUDING BASE PLATE AND RAILING

DIMENSIONS	
Base plate with rollers	983 x 710 x 50mm
Completion Railing	340 x 850mm
Material	Stainless steel 304 (IP44) Indoor Stainless steel 312 (IP65) Outdoor

ACCESSORIES

PRODUCT ACCESSORIES		
Accessories	iDTRONIC R840 Ethernet QR Code Reader ID Ident 1500/2000 Remote Control (Wired /Wireless) 3rd party reader installation (z.B. MIFARE, LEGIC, EM, HID etc.)	

IT IS EITHER POSSIBLE TO HAVE A CONTINUOUS PASSAGE (FREE EXIT), OR TO USE A COUNTER.

BOTH FUNCTIONS CANNOT BE INSTALLED SIMULTANEOUSLY.



PRODUCT VIEW



OPTIONAL ACCESSORY BASE PLATE

